





European Profile

25, 26 and 27 Series

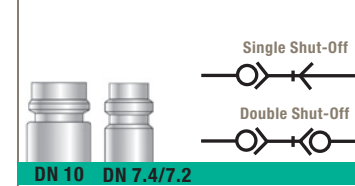





9101

Coupler, Male BSPP Thread

	Nickel-plated brass, NBR									
	7.2		DN	C	E	F	G	L	kg	
			G1/8	9101 26 10	9	22	27	43	0.073	
			G1/4	9101 26 13	9	22	27	43	0.073	
			G3/8	9101 26 17	9	22	27	13	0.075	
G1/2	9101 26 21	12	22	27	46	0.087				
26 Series (DN 7.2): single shut-off = 1000 NL/min										





9201

Coupler, Male BSPP Thread

	Nickel-plated brass, NBR			C		E	F	G	L	kg
			7.4	G1/4	9201 25 13	9	19	23	57	0.095
				G3/8	9201 25 17	9	19	23	57	0.097
				G1/2	9201 25 21	12	22	23	60	0.135
			10	G3/8	9201 27 17	9	24	27	65	0.160
G1/2	9201 27 21	12		24	27	70	0.166			
G3/4	9201 27 27	16		27	27	74	0.239			
25 Series (DN 7.4): single shut-off = 1800 NL/min / 25 Series (DN 7.4): double shut-off = 710 NL/min 27 Series (DN 10): single shut-off = 2400 NL/min / 27 Series (DN 7.4): double shut-off = 900 NL/min										





9214

Coupler, Female BSPP Thread

	Nickel-plated brass, NBR			C		E	F	G	L	kg
7.4	G1/4	9214 25 13	9	19	23	55	0.098			
	G3/8	9214 25 17	9	19	23	55	0.092			
	G1/2	9214 25 21	12	24	23	57	0.124			
10	G3/8	9214 27 17	12	24	27	68	0.177			
	G1/2	9214 27 21	12	24	27	68	0.166			
	G3/4	9214 27 27	16	32	27	74	0.255			
25 Series (DN 7.4): single shut-off = 1800 NL/min / 25 Series (DN 7.4): double shut-off = 710 NL/min 27 Series (DN 10): single shut-off = 2400 NL/min / 27 Series (DN 7.4): double shut-off = 900 NL/min										

9114



Coupler, Female BSPP Thread

	Nickel-plated brass, NBR			C							E	F	G	L	kg
7.2				G1/4	9114 26 13	9	22	27	43	0.089					
				G3/8	9114 26 17	9	22	27	43	0.084					
				G1/2	9114 26 21	12	24	27	46	0.090					
26 Series (DN 7.2): single shut-off = 1000 NL/min															

9223

Coupler with Barb Connection

Nickel-plated brass, NBR


	ØD		F	G	L	L1	kg
7.4	6	9223 25 06	19	23	73	25	0.095
	8	9223 25 08	19	23	73	25	0.097
	10	9223 25 10	19	23	73	25	0.097
	13	9223 25 13	19	23	73	25	0.099
10	8	9223 27 08	24	27	80	21	0.146
	10	9223 27 10	24	27	80	21	0.162
	13	9223 27 13	24	27	80	21	0.164
	19	9223 27 19	24	27	80	21	0.168

25 Series (DN 7.4): single shut-off = 1800 NL/min / 25 Series (DN 7.4): double shut-off = 710 NL/min

27 Series (DN 10): single shut-off = 2400 NL/min / 27 Series (DN 7.4): double shut-off = 900 NL/min

European Profile

25, 26 and 27 Series



9087

Probe, Straight-Through, Male BSPP Thread

	Nickel-plated steel, technical polymer	DN	C		E	F	L	L1	kg
7.4			G1/8	9087 25 10	7	13	31	20	0.018
			G1/4	9087 25 13	9	14	34	20	0.018
			G3/8	9087 25 17	9	17	34	20	0.025
			G1/2	9087 25 21	12	22	38	20	0.047
10			G3/8	9087 27 17	9	19	37	22	0.031
			G1/2	9087 27 21	12	22	40	22	0.046
			G3/4	9087 27 27	16	32	45	22	0.085

Probe without shut-off
25 Series probe (DN 7.4) compatible with 26 Series coupler (DN 7.2)

9086

Probe, Straight-Through, Female BSPP Thread

	Nickel-plated steel	DN	C		E	F	L	L1	kg
7.4			G1/8	9086 25 10	7	14	32	20	0.015
			G1/4	9086 25 13	9	17	38.5	20	0.027
			G3/8	9086 25 17	9	19	33	20	0.027
			G1/2	9086 25 21	12	24	36	20	0.050
10			G3/8	9086 27 17	9	19	34	22	0.026
			G1/2	9086 27 21	12	24	38	22	0.041
			G3/4	9086 27 27	16	32	42	22	0.090

Probe without shut-off
25 Series probe (DN 7.4) compatible with 26 Series coupler (DN 7.2)

9085

Probe, Straight-Through, with Barb Connection

	Nickel-plated steel	DN	ØD		L	L1	L2	kg
7.4			6	9085 25 06	48	20	25	0.013
			8	9085 25 08	48	20	25	0.015
			9	9085 25 09	48	20	25	0.015
			10	9085 25 10	48	20	25	0.016
			13	9085 25 13	48	20	25	0.020
10			8	9085 27 08	48	22	25	0.021
			10	9085 27 10	48	22	25	0.023
			13	9085 27 13	48	22	25	0.026
			19	9085 27 19	48	22	25	0.038

Probe without shut-off
25 Series probe (DN 7.4) compatible with 26 Series coupler (DN 7.2)

9287


Probe, Valved, Male BSPP Thread

	Nickel-plated brass, NBR	DN	C		E	F	L	L1	kg
7.4			G1/8	9287 25 10	7	22	41	20	0.046
			G1/4	9287 25 13	9	22	43	20	0.046
			G3/8	9287 25 17	9	22	43	20	0.049
			G1/2	9287 25 21	12	22	46	20	0.060
10			G3/8	9287 27 17	9	24	58	22	0.086
			G1/2	9287 27 21	12	24	58	22	0.090
			G3/4	9287 27 27	16	27	62	22	0.132

Probe with shut-off
25 Series probe (DN 7.4) not compatible with 26 Series coupler (DN 7.2)

European Profile

25, 26 and 27 Series

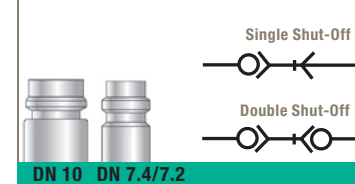

9286

Probe, Valved, Female BSPP Thread

	Nickel-plated steel, NBR		DN	C		E	F	L	L1	kg
7.4						10	22	43	20	0.068
						10	22	43	20	0.062
						10	22	43	20	0.058
						12	24	46	20	0.064
10						9	24	55	22	0.096
						12	24	55	22	0.086
						16	32	58	22	0.149

Probe with shut-off
25 Series Probe (DN 7.4) not compatible with 26 Series coupler (DN 7.2)

9285

Probe, Valved, with Barb Connection

	Nickel-plated steel, NBR		DN	ØD		F	L	L1	L2	kg
7.4						21	60	20	25	0.047
						21	60	20	25	0.048
						21	60	20	25	0.049
						21	60	20	25	0.053
10						24	75	22	25	0.097
						24	75	22	25	0.099
						24	75	22	25	0.103
						24	75	22	25	0.105
						24	75	22	25	0.105

Probe with shut-off
25 Series Probe (DN 7.4) not compatible with 26 Series coupler (DN 7.2)

9293

Probe, Valved, Anti-Whiplash, Female BSPP Thread

	Nickel-plated steel, NBR		DN	C		E	F	L	L1	kg
7.4				G3/8		10	22	43	20	0.052

Probe with shut-off
25 Series Probe (DN 7.4) not compatible with 26 Series coupler (DN 7.2)