

Winkel-Schottverschraubung

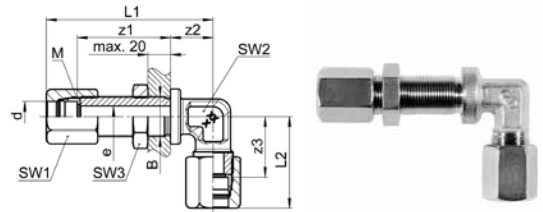
Durchführungslänge max. 20 mm

Coude traversée de cloison

pour cloison max. 20 mm

Panel mount elbow union

max. panel thickness 20 mm

SO 52721


Type -d	Mat.-Nr.	bar	M	SW1	SW2	SW3	L1	L2	B	z1	z2	z3	e	kg/100
SO 52721-6	058.2700.060	200	10x1.0	12	12	14	57.0	27.0	10.5	36.0	13.0	19.0	4.5	6.980
SO 52721-8	058.2700.080	200	12x1.0	14	12	17	57.5	27.5	12.5	36.0	13.0	19.0	5.5	9.450
SO 52721-10	058.2700.100	160	14x1.0	17	12	19	64.5	34.5	14.5	36.0	17.0	23.0	7.5	12.350
SO 52721-12	058.2700.120	160	16x1.0	19	14	22	66.0	36.0	16.5	37.0	17.0	24.0	8.5	17.060
SO 52721-15	058.2700.150	100	20x1.5	24	19	27	77.5	43.5	20.5	40.5	23.0	29.5	13.0	28.600
SO 52721-18	058.2700.180	100	24x1.5	30	24	30	80.0	49.0	24.5	42.5	22.0	33.5	15.0	34.380
SO 52721-22	058.2700.220	64	28x1.5	32	27	36	94.5	56.5	28.5	46.5	29.0	37.5	19.0	31.800

Sechskantmutter siehe SO 50006 METR

Ecrou à six pans voir SO 50006 METR

Hexagon nut see SO 50006 METR