

## Hydraulic steel-clamps

### Hydraulic steel-clamps

#### Order code **HSRS-\***





W1: steel coating, Cr(VI)-free

\* please add. Ø D

**HSRS** hydraulic steel-clamps are mainly used in the field of building machinery.


The support-block is welded to the machine body or another component either in upend or flat position. The tube-clamp is screwed on.

The robust construction of the clamp has an impact- and vibration-absorbing effect. The small dimension/height of the clamp allows hydraulic cables to be fitted later on – e. g. for installing additional equipment to building machinery.

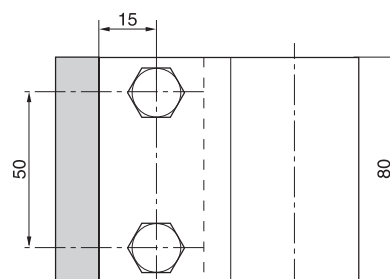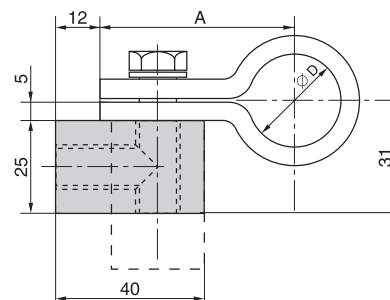


Order code		Dimensions	
Clamp incl. block	Clamp without block	Ø D	A
HSRS25	HSRS3-25CFX	25	52.5
HSRS30	HSRS3-30CFX	30	55.0
HSRS35	HSRS3-35CFX	35	57.5
HSRS38	HSRS3-38CFX	38	59.0
HSRS42	HSRS3-42CFX	42	61.0
HSRS48	HSRS3-48CFX	48	64.0
HSRS50	HSRS3-50CFX	50	65.0
HSRS60	HSRS3-60CFX	60	70.0

Hydraulic steel-clamps

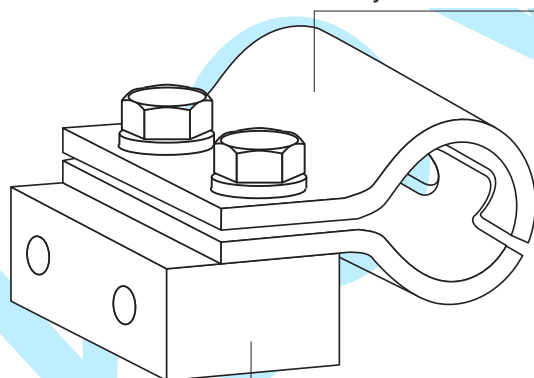

flat

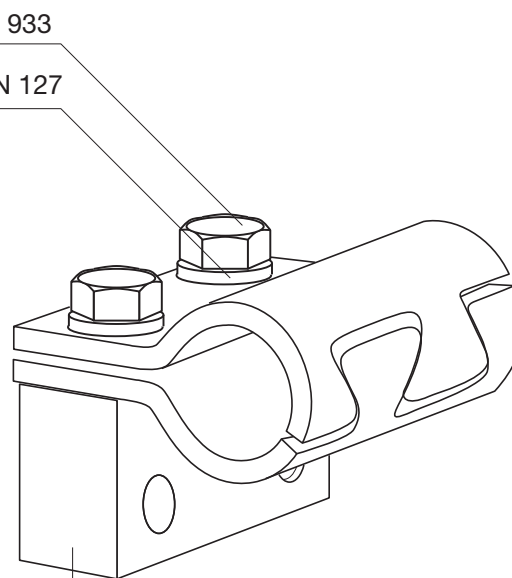

upend

support to welding

## Hydraulic steel-clamps

### Elastomere Inlay for HSRS

**Order code** EE-\*  
 \* complete outside tube diameter

Hydraulic steel tube clamp HSRS  
 also available with Elastomere inlay


**The advantages:**

- complete outside tube diameter
- Safe fastening method even for very sensitive tube and hoses lines
- Only one clamp for different tube diameters

**Material:**

Santoprene 64 Shore

- high oil and weathering resistance
- temperature stability between -40 °C and +120 °C

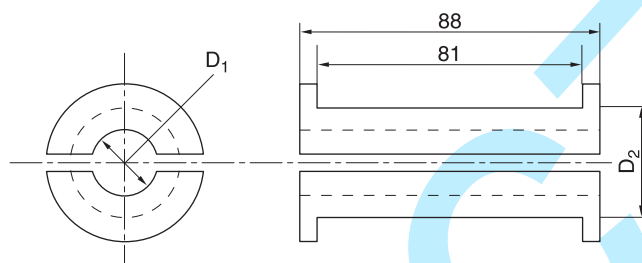

Order code Elastomere inlay	Nominal size D2	mm O.D. D1
EE12X	HSRS25	12
EE15X		15
EE20X		20
EE25X		25
EE30X		30
EE35X	HSRS50	35
EE38X		38
EE42X		42
EE47X	HSRS60	47
EE50X		50

