

CV

Check  
Valves

SH

Shuttle  
ValvesLM  
Load/Motor  
Controls

FC

Flow  
Controls

PC

Pressure  
Controls

LE

Logic  
ElementsDC  
Directional  
Controls

MV

Manual  
Valves

SV

Solenoid  
ValvesPV  
Proportional  
ValvesCE  
Coils &  
ElectronicsBC  
Bodies &  
Cavities

TD

Technical  
Data

## General Description




Restrictive Style, Pressure Compensated Flow Control Valve. For additional information see Technical Tips on pages FC1-FC4.

## Features

- Minimal flow change with pressure variation
- Reverse flow function
- Full adjustment from 1-20 LPM (0.3-5.3 GPM)
- Hardened working parts for maximum durability
- Adjustable and tamperproof versions available
- All external parts zinc plated


## Specifications

<b>Rated Flow</b>	20 LPM (5.3 GPM)
<b>Maximum Inlet Pressure</b>	420 Bar (6000 PSI)
<b>Cartridge Material</b>	All parts steel. All operating parts hardened steel.
<b>Operating Temp. Range/Seals</b>	-34°C to +121°C (Nitrile) (-30°F to +250°F) -26°C to +204°C (Fluorocarbon) (-15°F to +400°F)
<b>Fluid Compatibility/Viscosity</b>	Mineral-based or synthetic with lubricating properties at viscosities of 45 to 2000 SSU (6 to 420 cSt)
<b>Filtration</b>	ISO-4406 18/16/13, SAE Class 4
<b>Approx. Weight</b>	.13 kg (.29 lbs.)
<b>Cavity</b>	C08-2 (See BC Section for more details)
<b>Form Tool</b>	Rougher    None Finisher    NFT08-2F

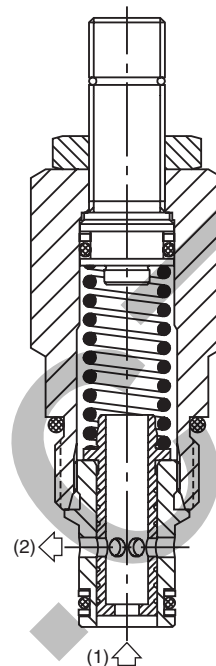


## Performance Curves (Through cartridge only)


### Flow Regulating Performance

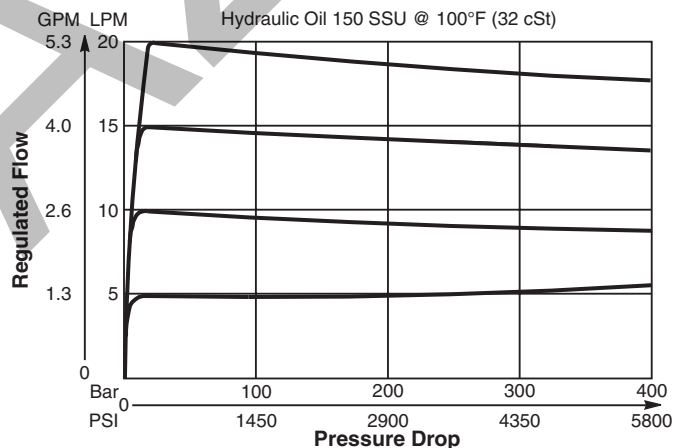

### Reverse Flow Pressure Drop vs. Flow

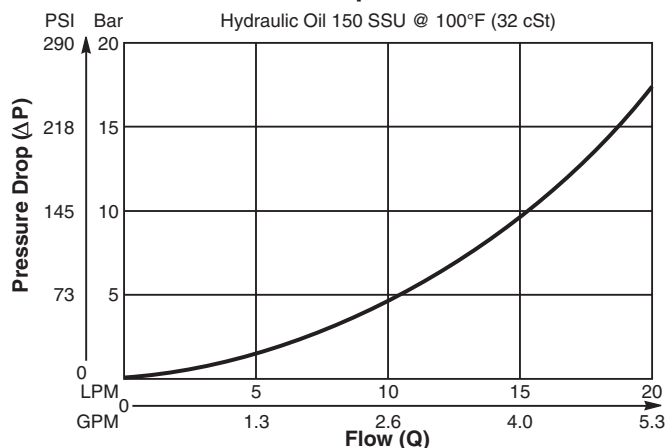

Dimensions    Millimeters (Inches)

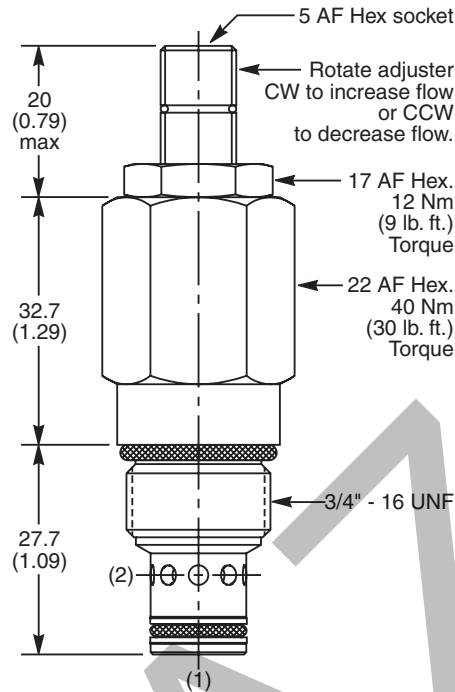

Ordering Information

**J02E2**

08 Size Pressure Compensated Flow Control Valve

Adjustment Style

Optional Flow Setting

Seals

Body Material

Port Size

Code	Adjustment Style
Z	Screw Adjust (Std.)
W	Knob Adjust
T	Tamper Resistant Cap (TC1130)

Code	Seals / Kit. No.
N	Nitrile, Buna-N (Std.) / (SK30500N-1)
V	Fluorocarbon / (SK30500V-1)

Code	Body Material
Omit	Steel
A	Aluminum

Code	Port Size	Body Part No.
Omit	Cartridge Only	
4T	SAE-4	(B08-2-*4T)
6T	SAE-6	(B08-2-*6T)

\* Add "A" for aluminum, omit for steel.

Code	Optional Flow Setting
Omit	Omit for no setting* Specify setting if required (LPM)

\* Appropriate mid-range setting for Standard = 10 LPM

CV

Check Valves

SH

Shuttle Valves

LM

Load/Motor Controls

FC

Flow Controls

PC

Pressure Controls

LE

Logic Elements

DC

Directional Controls

MV

Manual Valves

SV

Solenoid Valves

PV

Proportional Valves

CE

Coils & Electronics

BC

Bodies & Cavities

TD

Technical Data