


CALORCONN VAPOR 208

[EN] for saturated steam services at a maximum working pressure of 17 bars (247 psi) in chemical plants. Steel mill, refineries. Shipyards and all industries.

[DE] geeignet für anwendungen mit sattdampf mit max. 17 bar (247 psi) für chemieindustrie, stahlwerke, raffinerien, werften und allen industriebereichen.

[ES] vapor saturado a un ejercicio de presión máxima de 17 bares, 247 psi. usado en los astilleros, en las instalaciones químicas, en las refinerías etc.

[FR] pour la vapeur saturée avec une pression maximale de 17 bar (247 psi) dans l'industrie chimique, les aciéries, les raffineries, les chantiers navals etc.

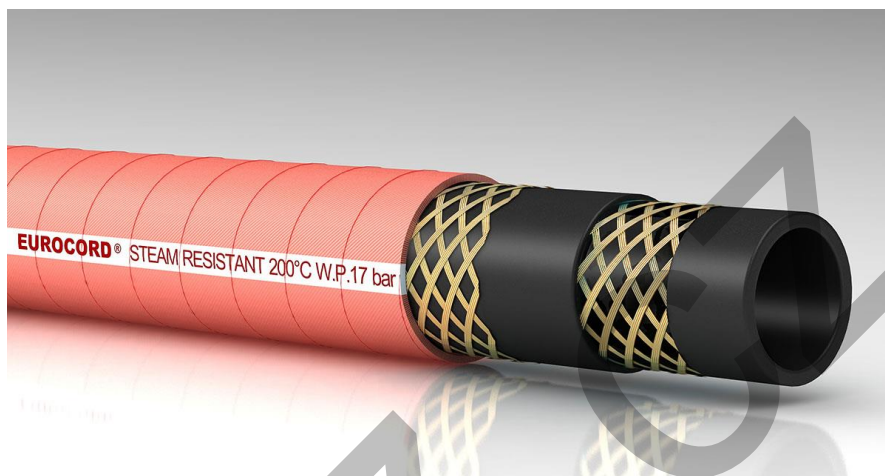

[EN] **TUBE:** EPDM rubber, resistant to saturated steam.

REINFORCEMENT: high tensile steel wire cords.

COVER: abrasion, heat, steam, oil, ozone and weather resistant. Pinpricked special synthetic rubber.

SURFACE: smooth with fabric impression.

[DE] **SEELE:** EPDM gummi, sattdampfbeständig.

EINLAGE: hochzugfeste stahlkordeinlage.

DECKE: abriebfest. hitze-, dampf-, öl-, ozon- und witterungsbeständig. speziell geprickter synthetischer gummi.

OBERFLÄCHE: stoffimpression.

[ES] **SUSTRATO:** caucho en EPDM resistente a el vapor saturado

REFUERZO: cuerdas de acero a alta tenacidad.

COBERTURA: caucho especial sintético, resistente al aceite, al calor, a la abrasión, al ozono y a los agentes atmosféricos.









SUPERFICIE: con impresión de tela.

[FR] **TUBE:** caoutchouc EPDM résistant à la vapeur saturée.

REINFORCEMENT: nappes métalliques haute ténacité.

REVETEMENT: caoutchouc synthétique spécial micro-perforé. Résistant à l'abrasion, à la chaleur, à la vapeur, aux huiles, à l'ozone et aux agents atmosphériques.

SURFACE: impression textile

							
mm	mm	bar	bar	bar	gr/mt	mm	mt
10	21	17	170	-	450	180	40
13	25	17	170	-	651	156	40
19	32	17	170	-	730	228	40
25	38	17	170	-	926	305	40
32	46	17	170	-	1612	386	40
38	54	17	170	-	2812	456	40
51	67	17	170	-	2419	610	40

STF - Hose clamps with screw / STC – Hose clamp with collar

-40°C / +208°C

-40°F / +406°F

NORME: ISO 1307

MARCATURA: EUROCORD® STEAM
RESISTANT 200°C W.P.17 BAR