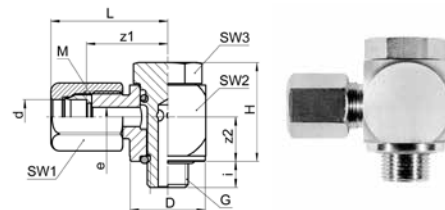


Schwenkverschraubung

Coude banjo

Single banjo

SO 52824


| Type -d -G | Mat.-Nr. | bar | M | SW1 | SW2 | SW3 | L | D | H | i | z1 | z2 | e | kg/100 |
|--|--------------|--|--------|-----|---|-----|------|------|------|------|------|------|------|--------|
| Für metrische Rohre G=Rohrgewinde (zylindrisch) | | Pour tubes métriques G=Filetage-gaz BSP (cylindrique) | | | For metric tubes G=BSP thread (parallel) | | | | | | | | | |
| ★ SO 52824-4-1/8 | 058.2841.060 | 200 | 10x1.0 | 12 | 16 | 14 | 26.0 | 18.0 | 23.0 | 6.5 | 18.0 | 10.5 | 4.5 | 5.000 |
| ★ SO 52824-5-1/8 | 058.2841.082 | 200 | 10x1.0 | 12 | 16 | 14 | 26.0 | 18.0 | 23.0 | 6.5 | 18.0 | 10.5 | 4.5 | 4.950 |
| SO 52824-6-1/8 | 058.2841.100 | 200 | 10x1.0 | 12 | 16 | 14 | 26.0 | 18.0 | 23.0 | 6.5 | 18.0 | 10.5 | 4.5 | 4.900 |
| ★ SO 52824-6-1/4 | 058.2841.110 | 200 | 12x1.0 | 14 | 24 | 19 | 29.5 | 21.0 | 27.5 | 8.5 | 21.0 | 12.0 | 6.5 | 10.100 |
| SO 52824-8-1/8 | 058.2841.160 | 200 | 12x1.0 | 14 | 19 | 14 | 27.5 | 18.0 | 23.0 | 6.5 | 19.0 | 10.5 | 4.5 | 6.300 |
| SO 52824-8-1/4 | 058.2841.170 | 200 | 12x1.0 | 14 | 24 | 19 | 29.5 | 21.0 | 27.5 | 8.5 | 21.0 | 12.0 | 6.5 | 9.950 |
| SO 52824-10-1/4 | 058.2841.270 | 160 | 14x1.0 | 17 | 24 | 19 | 32.0 | 21.0 | 27.5 | 8.5 | 20.5 | 12.0 | 8.5 | 10.800 |
| ★ SO 52824-10-3/8 | 058.2841.280 | 160 | 16x1.0 | 19 | 30 | 24 | 36.5 | 28.0 | 37.5 | 9.5 | 24.0 | 15.0 | 10.5 | 17.200 |
| SO 52824-12-3/8 | 058.2841.390 | 160 | 16x1.0 | 19 | 30 | 24 | 36.0 | 28.0 | 37.5 | 9.5 | 24.0 | 15.0 | 10.5 | 16.800 |
| ★ SO 52824-12-1/2 | 058.2841.400 | 100 | 20x1.5 | 24 | 35 | 27 | 42.0 | 32.0 | 43.5 | 11.0 | 28.0 | 18.0 | 13.0 | 32.200 |
| ★ SO 52824-14-1/2 | 058.2841.504 | 100 | 20x1.5 | 24 | 35 | 27 | 42.5 | 32.0 | 43.5 | 11.0 | 28.5 | 18.0 | 13.0 | 31.800 |
| SO 52824-15-1/2 | 058.2841.534 | 100 | 20x1.5 | 24 | 35 | 27 | 42.5 | 32.0 | 43.5 | 11.0 | 28.5 | 18.0 | 13.0 | 31.600 |
| SO 52824-18-1/2 | 058.2841.646 | 100 | 24x1.5 | 30 | 35 | 27 | 44.0 | 32.0 | 43.5 | 11.0 | 28.5 | 18.0 | 13.0 | 34.690 |

Für Zollrohre

Pour tubes pouces

For inch tubes

| | | | | | | | | | | | | | | |
|-------------------|--------------|-----|--------|----|----|----|------|------|------|------|------|------|------|--------|
| SO 52824-6,35-1/8 | 058.2841.135 | 200 | 10x1.0 | 12 | 16 | 14 | 26.0 | 18.0 | 23.0 | 6.5 | 18.0 | 10.5 | 4.5 | 4.900 |
| SO 52824-9,52-1/4 | 058.2841.230 | 160 | 14x1.0 | 17 | 24 | 19 | 32.0 | 21.0 | 27.5 | 8.5 | 20.5 | 12.0 | 8.5 | 10.800 |
| SO 52824-12,7-1/2 | 058.2841.434 | 160 | 20x1.5 | 24 | 35 | 27 | 42.0 | 32.0 | 43.5 | 11.0 | 28.5 | 18.0 | 13.0 | 32.000 |

Umrechnung für "d" bei Zollrohren:

 6,35 = 1/4
 9,52 = 3/8
 12,7 = 1/2

Conversion de "d" pour tubes en pouces:

 6,35 = 1/4
 9,52 = 3/8
 12,7 = 1/2

Conversion for "d" for inch tubes:

 6,35 = 1/4
 9,52 = 3/8
 12,7 = 1/2

O-Ringe: FKM


Joints: FKM

O-Rings: FKM

Schwenkverschraubung METR

Coude banjo METR

Single banjo METR

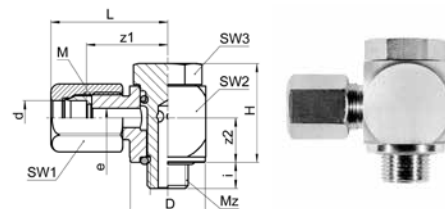SO 52824 METR


| Type -d -Mz | Mat.-Nr. | bar | M | SW1 | SW2 | SW3 | L | D | H | i | z1 | z2 | e | kg/100 |
|-------------------------------------|--------------|------------------------------------|--------|-----|-----------------------------|-----|------|------|------|------|------|------|------|--------|
| Mz=metrisches Gewinde (zylindrisch) | | Mz=Filetage métrique (cylindrique) | | | Mz=Metric thread (parallel) | | | | | | | | | |
| ★ SO 52824-3-M5 | 058.2843.050 | 250 | 8x1.0 | 10 | 12 | 10 | 22.0 | 12.0 | 15.0 | 5.5 | 15.0 | 6.0 | 3.5 | 2.250 |
| SO 52824-4-M5 | 058.2843.080 | 250 | 8x1.0 | 10 | 12 | 10 | 21.5 | 12.0 | 15.0 | 5.5 | 15.0 | 6.0 | 3.5 | 2.170 |
| SO 52824-5-M5 | 058.2843.110 | 250 | 8x1.0 | 10 | 12 | 10 | 22.0 | 12.0 | 15.0 | 5.5 | 15.0 | 6.0 | 3.5 | 2.180 |
| SO 52824-10-M12x1,5 | 058.2843.275 | 160 | 14x1.0 | 17 | 24 | 19 | 32.0 | 21.0 | 27.5 | 8.5 | 20.5 | 12.0 | 8.5 | 11.600 |
| SO 52824-18-M22x1,5 | 058.2843.646 | 100 | 24x1.5 | 30 | 35 | 27 | 44.0 | 32.0 | 43.5 | 11.0 | 28.5 | 18.0 | 13.0 | 35.000 |

O-Ringe: FKM

Joints: FKM

O-Rings: FKM

 d=Rohraussen-ø
 e=kleinste Bohrung
 L=Mass in montiertem Zustand
 *=mit reduziertem Klemmring

 d=ø extérieur du tube
 e=ø-min. de passage
 L=après montage
 *=avec bague de serrage de réduction

 d=tube outside diameter
 e=minimum bore
 L=installed length
 *=with reduction compression ferrule