

Sechskant Kugelhahn

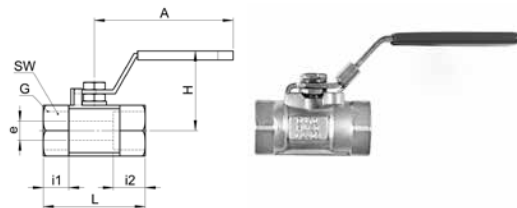
mit Innengewinde

Vanne à bille hexagonale

avec taraudage

Hexagon ball valve

with female thread

SO BV 58D00


Type -G	Mat.-Nr.	bar	SW	L	A	H	i1	i2	e	kg/100
G=Rohrgewinde (zylindrisch)		G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)						
SO BV 58D00-1/4	068.8061.040	90	28	58.5	102.0	46.0	14.0	15.5	9.2	32.000
SO BV 58D00-3/8	068.8061.060	90	28	58.5	102.0	46.0	15.0	15.0	9.2	32.000
SO BV 58D00-1/2	068.8061.080	90	28	66.0	97.0	54.0	20.0	17.5	9.2	27.500
SO BV 58D00-3/4	068.8061.120	90	34	70.0	98.0	56.0	21.0	19.0	12.5	36.000
SO BV 58D00-1	068.8061.160	90	39	80.0	104.0	63.0	24.0	20.0	15.5	63.000

Spezifikationen

Betriebsdruck (PN): 90 bar
Sicherheitsfaktor: 1.5-fach
Temperatur: -20°C bis +200°C

Materialien

Ventilkörper, Kugel, Spindel: Edelstahl 1.4408
Griff: Edelstahl 1.4301 (AISI 304) mit PVC-Überzug
Dichtungen: PTFE

Dienstleistungsoptionen auf Anfrage

Spécifications

Pression de service (PN): 90 bar
Facteur de sécurité: 1.5 fois
Température: -20°C à +200°C

Matériaux

Corps, bille, pointeau: acier inoxydable 1.4408
Manette: acier inoxydable 1.4301 (AISI 304), couche en PVC
Joints: PTFE

Options de service sur demande

Specifications

Working pressure (PN): 90 bar
Safety factor: 1.5 times
Temperature: -20°C to +200°C

Materials

Valve body, ball, spindle: stainless steel 1.4408
Handle: stainless steel 1.4301 (AISI 304) with PVC cover
Seals: PTFE

Optional services on request