


## Übergangsmuffe G-G

### Adaptateur femelle G - femelle G

#### Female adaptor G-G




#### AD FA 80

Type -G -G2	Mat.-Nr.	SW	L	D	i	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)			
G2=Rohrgewinde (zylindrisch)	G2=Filetage-gaz BSP (cylindrique)		G2=BSP thread (parallel)			
AD FA 80-1/8-1/8	036.0311.042	14	16.0	13.8	8.0	1.240
AD FA 80-1/8-1/4	036.0311.044	17	19.0	16.8	9.0	2.170
AD FA 80-1/4-1/4	036.0311.104	17	18.0	16.8	9.0	1.710
AD FA 80-1/4-3/8	036.0311.106	22	21.0	21.8	9.5	4.060
AD FA 80-1/4-1/2	036.0311.108	27	23.0	26.8	11.5	6.900
AD FA 80-3/8-3/8	036.0311.166	22	19.0	21.8	9.5	3.090
AD FA 80-3/8-1/2	036.0311.168	27	23.5	26.8	11.5	6.520
AD FA 80-1/2-1/2	036.0311.228	27	23.0	26.8	11.5	5.450
AD FA 80-3/4-1/2	036.0311.288	32	28.5	31.8	11.5	9.870

## Übergangsnippel G-R

### Adaptateur femelle G - mâle R

#### Adaptor female G - male R

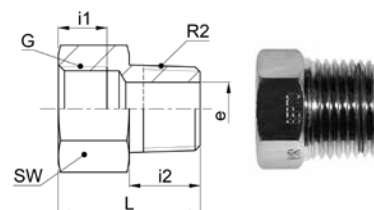

#### AD A 80 G-R

Type -G -R2	Mat.-Nr.	SW	L	i1	i2	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)			
R2=Rohrgewinde (kegelig)	R2=Filetage-gaz BSP (conique)			R2=BSP thread (tapered)			
AD A 80-1/8-1/8	036.0411.042	14	21.0	8.0	8.0	5.0	2.100
AD A 80-1/8-1/4	036.0411.044	14	17.5	8.0	12.0	8.5	1.060
AD A 80-1/8-1/2	036.0411.048	22	23.0	9.6	16.0	14.0	3.970
AD A 80-1/4-1/8	036.0411.102	17	22.0	9.0	8.0	5.0	1.630
AD A 80-1/4-3/8	036.0411.106	17	20.0	9.0	12.0	11.4	1.690
AD A 80-1/4-1/2	036.0411.108	22	23.0	9.7	16.0	14.0	3.590
AD A 80-3/8-1/2	036.0411.168	22	23.0	9.5	16.0	14.9	2.740
AD A 80-1/2-3/4	036.0411.232	27	27.5	11.5	16.5	18.6	5.133