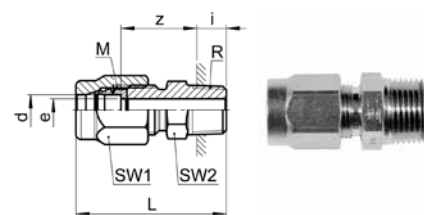


# Gerade Einschraubverschraubung Union mâle Male adaptor union


**SO 81121**

Type -d-R	Mat.-Nr.	bar	M	SW1	SW2	L	i	z	e	kg/100
Für metrische Rohre R=Rohrgewinde (kegelig)	Pour tubes métriques R=Filetage-gaz BSP (conique)	For metric tubes R=BSP thread (tapered)								
SO 81121-4-1/8	038.1101.060	125	8x1.0	10	10	27.0	5.0	16.0	3.4	1.410
★ SO 81121-4-1/4	038.1101.065	125	10x1.0	12	14	34.0	8.0	18.5	3.4	2.930
SO 81121-6-1/8	038.1101.100	125	10x1.0	12	10	28.5	5.0	16.0	4.5	1.690
SO 81121-6-1/4	038.1101.110	125	10x1.0	12	14	34.5	8.0	18.5	4.5	2.820
SO 81121-6-3/8	038.1101.120	125	10x1.0	12	17	34.5	8.0	19.0	4.5	3.390
SO 81121-8-1/8	038.1101.160	80	12x1.0	14	12	30.5	5.0	17.5	6.0	2.260
SO 81121-8-1/4	038.1101.170	80	12x1.0	14	14	35.5	8.0	19.5	6.5	3.110
SO 81121-8-3/8	038.1101.180	80	12x1.0	14	17	36.0	8.0	20.0	6.5	3.730
SO 81121-8-1/2	038.1101.185	80	12x1.0	14	22	41.0	10.0	23.0	6.5	6.040
SO 81121-10-1/4	038.1101.270	60	14x1.0	17	14	37.5	8.0	19.5	8.5	3.630
SO 81121-10-3/8	038.1101.280	60	14x1.0	17	17	38.0	8.0	20.0	8.5	4.830
SO 81121-10-1/2	038.1101.285	60	14x1.0	17	22	43.0	10.0	23.0	8.5	8.040
SO 81121-12-1/4	038.1101.380	40	16x1.0	19	17	39.0	8.0	20.0	8.5	4.820
SO 81121-12-3/8	038.1101.390	40	16x1.0	19	17	39.0	8.0	20.0	10.0	5.110
SO 81121-12-1/2	038.1101.400	40	16x1.0	19	22	44.0	10.0	23.0	10.0	7.760
SO 81121-15-3/8	038.1101.532	25	20x1.5	24	22	44.0	8.0	23.5	10.5	8.820
SO 81121-15-1/2	038.1101.534	25	20x1.5	24	22	48.0	10.0	25.5	13.0	9.110
SO 81121-15-3/4	038.1101.536	25	20x1.5	24	27	49.0	12.0	24.5	13.0	10.650
SO 81121-18-1/2	038.1101.646	25	24x1.5	27	24	50.5	10.0	26.5	15.0	10.760

Für Zollrohre

Pour tubes pouces

For inch tubes

SO 81121-6,35-1/8	038.1101.135	125	10x1.0	12	10	28.5	5.0	16.0	4.5	1.680
-------------------	--------------	-----	--------	----	----	------	-----	------	-----	-------

 Umrechnung für "d" bei Zollrohren:  
 6,35 = 1/4

 Conversion de "d" pour tubes en pouces:  
 6,35 = 1/4

 Conversion for "d" for inch tubes:  
 6,35 = 1/4

d=Rohraussen-ø  
 e=kleinste Bohrung  
 L=Mass in montiertem Zustand  
 \*=mit reduziertem Klemmring

d=ø extérieur du tube  
 e=ø-min. de passage  
 L=après montage  
 \*=avec bague de serrage de réduction

d=tube outside diameter  
 e=minimum bore  
 L=installed length  
 \*=with reduction compression ferrule