

Messing CV

Laiton CV

Brass CV

Gerade Schottverschraubung

Durchführungslänge max. 5 mm


Union double traversée de cloison

pour cloison max. 5 mm

Panel mount union

max. panel thickness 5 mm

SO 81521

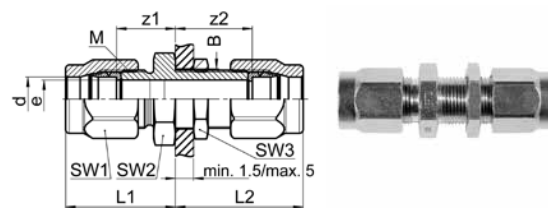

Type -d	Mat.-Nr.	bar	M	SW1	SW2	SW3	L1	L2	B	z1	z2	e	kg/100
SO 81521-6	038.1500.060	125	10x1.0	12	14	14	21.0	26.5	10.5	13.5	19.0	4.5	3.540
SO 81521-8	038.1500.080	80	12x1.0	14	17	17	23.0	28.0	12.5	15.0	20.0	6.5	5.320
SO 81521-10	038.1500.100	60	14x1.0	17	19	19	25.5	31.0	14.5	15.5	21.0	8.5	7.710
SO 81521-12	038.1500.120	40	16x1.0	19	22	19	27.0	32.0	16.5	16.0	21.0	10.0	9.320
SO 81521-15	038.1500.150	25	20x1.5	24	27	27	32.0	37.0	20.5	19.5	24.5	13.0	16.080
SO 81521-18	038.1500.180	25	24x1.5	27	30	27	33.5	36.5	24.5	19.5	22.5	15.0	18.500

Sechskantmutter siehe SO 80006 METR

Ecrou à six pans voir SO 80006 METR

Hexagon nut see SO 80006 METR

d=Rohraussen-ø
e=kleinste Bohrung
L=Mass in montiertem Zustand

d=ø extérieur du tube
e=ø-min. de passage
L=après montage

d=tube outside diameter
e=minimum bore
L=installed length