

Gerade Schottverschraubung

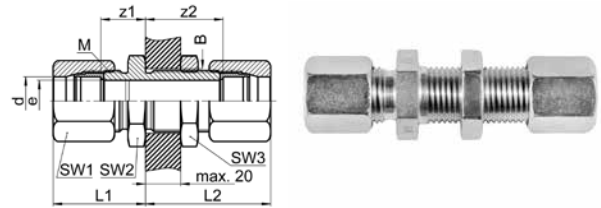
Durchführungs-länge max. 20 mm

Union double traversée de cloison

pour cloison max. 20 mm

Panel mount union

max. panel thickness 20 mm

SO 6333


Type -d	Mat.-Nr.	bar	M	SW1	SW2	SW3	L1	L2	B	z1	z2	e	kg/100
SO 6333-6	218.1500.060	400	12x1.5	14	17	17	23.0	43.0	12.5	15.0	35.0	5.0	6.200
SO 6333-8	218.1500.080	300	14x1.5	17	19	19	24.0	43.0	14.5	16.0	35.0	6.2	8.500
SO 6333-10	218.1500.100	250	16x1.5	19	22	22	28.0	46.0	16.5	18.0	36.0	8.2	12.500
SO 6333-12	218.1500.120	250	18x1.5	22	24	24	30.0	49.0	18.5	18.0	37.0	10.2	16.100
SO 6333-14	218.1500.140	250	22x1.5	27	27	30	33.0	52.0	22.5	20.0	39.0	12.5	27.300
SO 6333-15	218.1500.150	200	22x1.5	27	27	30	33.0	52.0	22.5	20.0	39.0	12.5	26.700
SO 6333-16	218.1500.160	200	24x1.5	30	30	32	36.0	54.0	24.5	21.0	39.0	14.0	35.000
SO 6333-18	218.1500.180	200	26x1.5	32	32	36	38.0	58.0	26.5	23.0	42.0	16.0	41.000
SO 6333-20	218.1500.200	200	26x1.5	32	32	36	40.5	59.5	26.5	23.5	42.5	16.0	41.000
SO 6333-22	218.1500.220	160	30x2.0	36	36	41	40.0	58.0	30.5	26.0	44.0	19.0	52.200

Sechskantmutter siehe SO 6310

Ecrou à six pans voir SO 6310

Hexagon nut see SO 6310