

## Einstellbare Verschraubung

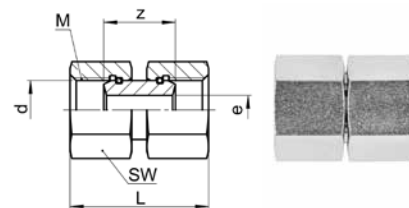
mit Dichtkante

## Union orientable

avec arête d'étanchéité

## Adjustable union

with edge seal

**SO 6345**


Type -d	Mat.-Nr.	bar	M	SW	L	z	e	kg/100
SO 6345-6	218.1350.060	250	12x1.5	14	27.0	14.5	4.0	1.980
SO 6345-8	218.1350.080	250	14x1.5	17	27.0	14.5	6.0	2.920
SO 6345-10	218.1350.100	200	16x1.5	19	30.0	15.0	7.0	3.820
SO 6345-12	218.1350.120	200	18x1.5	22	31.0	15.0	9.0	5.000
SO 6345-14	218.1350.140	160	22x1.5	27	36.5	18.5	11.0	9.130
SO 6345-15	218.1350.150	160	22x1.5	27	36.5	18.5	11.0	9.130
SO 6345-18	218.1350.180	160	26x1.5	32	36.5	18.5	14.0	13.000
SO 6345-20	218.1350.200	160	26x1.5	32	36.5	18.5	14.0	13.000
SO 6345-22	218.1350.220	160	30x2.0	36	38.5	18.5	18.0	16.100

## Einstellbare Verschraubung

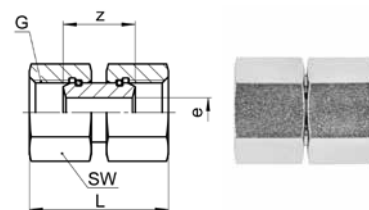
mit Dichtkante

## Union orientable

avec arête d'étanchéité

## Adjustable union

with edge seal

**SO 6345 G**


Type -G	Mat.-Nr.	bar	SW	L	z	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)				
SO 6345-1/8	218.1361.020	250	14	27.0	14.5	4.0	2.350
SO 6345-1/4	218.1361.040	250	17	27.0	14.5	6.0	3.020
SO 6345-3/8	218.1361.060	200	22	31.0	15.0	9.0	5.320
SO 6345-1/2	218.1361.080	160	27	38.5	18.5	11.0	9.880

Fortsetzung nächste Seite

Suite à la prochaine page

Continued on next page