

Electrical Parts




481865 Series - Standard Coil Mono-Frequency F Class - IP65

Encapsulated in synthetic material. Connector for 2P+E DIN 43650 A Plug. IP65 insulation class to be considered with connector plug only.

This coil conforms to the IEC/CENELEC safety standards and complies with European low-voltage directive 73/23/EC.

Voltage tolerances:	-10% to +10% of the nominal voltage (AC), -5% to +10% of the nominal voltage (DC).
Duty:	Continuous duty coil (100%ED).
Weight:	130 g without plug.

Voltage	Power Consumption	Reference	Approvals	Ambient Temperature	Class of Insulation	Dimensional Drawing
24/50	8 W	481865A2	VDE	-40°C to +50°C	F Class 155°C	22
110/50	8 W	481865A5	VDE	-40°C to +50°C	F Class 155°C	22
220-230/50	8 W	4818653D	VDE	-40°C to +50°C	F Class 155°C	22
24/60	8 W	481865B2	VDE	-40°C to +50°C	F Class 155°C	22
230/60	8 W	481865J3	VDE	-40°C to +50°C	F Class 155°C	22
115/60	8 W	481865K8	VDE	-40°C to +50°C	F Class 155°C	22
24 DC	9 W	481865C2	VDE	-40°C to +50°C	F Class 155°C	22

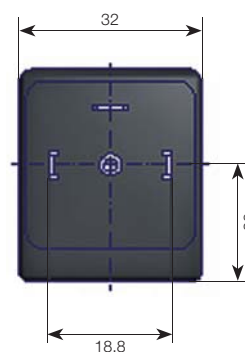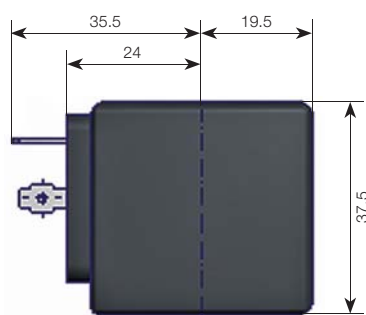

All dimensions are in mm

Dimensional Drawing N° 22