


AQUACONN HEAVY DUTY

WATER/SUCTION DELIVERY

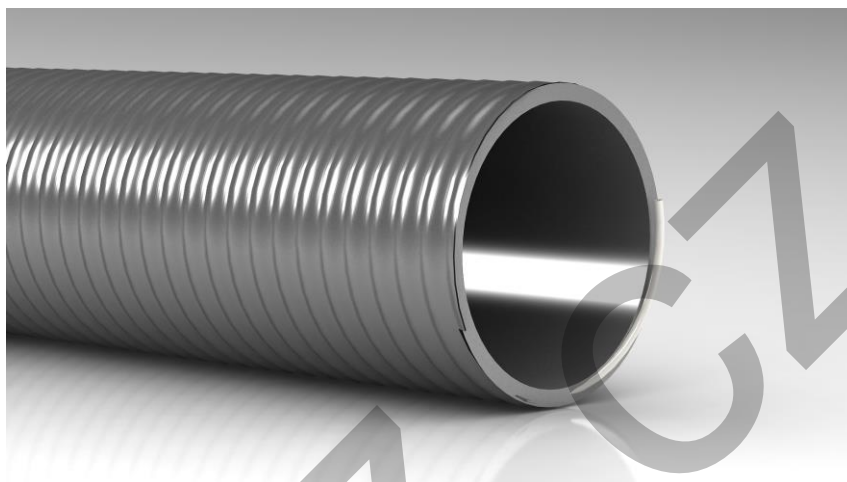

[EN] for heavy-duty suction and delivery of water, salt water, light chemicals, liquids etc. In agricultural, industrial applications and constructions.

[DE] für schwereanwendungen zur be-und entladen von wasser, salzvasser, leichte chemikalien; for landwirtschaft, industrien, bauwerke und haushalt.

[ES] manguera de alto rendimiento para irrigacion, aspiración y suministro de aguas, varios productos químicos ligeros, líquidos. de uso doméstico, para el sector de la construcción., industria etc.

[FR] manguera de alto rendimiento para irrigacion, aspiración y suministro de aguas, varios productos químicos ligeros, líquidos. de uso doméstico, para el sector de la construcción., industria etc.

[EN] **Construction:** strong, flexible and smooth plasticized pvc. Shock resistant pvc spiral.

Cover: crushing, chemical agents, abrasion and weather resistant, light corrugated outside..

[DE] **Konstruktion:** stabiler, hochflexibler, glatter, plastifizierter pvc. Mit verstärkungsspirale aus schlag-und druckfestem pvc.








Decke: äusserst strapazierfähig und biegsam, druck-und abriebfest, uv-und witterungs-und Chemikalienbeständig, leicht gewellte aussendecke

[ES] **Construcción:** manguera lisa, ligera y flexible en pvc. Espiral de refuerzo en pvc rígido anti choque y antideformante.

Cobertura: manguera lisa, ligera y flexible en pvc. espiral de refuerzo en pvc rígido anti choque y antideformante.

[FR] **Construction:** tuyau lisse et flexible en pvc souple. Spire en pvc rigide antichoc.

Revetement: surface semi-ondulée resistente a l'abrasion, les agents atmospheriques, ecrasement et la plupart des produits chimiques.

						
mm	mm	bar	gr/mt	bar	mm	mt
20	4,6	0,95	415	9	114	50
25	4,6	0,95	555	8	150	50
30	4,8	0,95	630	8	180	50
32	4,8	0,95	680	8	192	50
35	5,0	0,95	730	8	210	50
38	5,0	0,95	775	7	228	50
40	5,0	0,95	825	7	240	50
45	5,1	0,95	970	7	270	50
50	5,6	0,95	1165	7	300	50
60	5,9	0,95	1550	7	360	50
70	6,1	0,95	1845	6	420	50
75	6,2	0,95	1940	6	450	50
80	6,4	0,95	2135	6	480	50
90	6,6	0,95	2425	6	540	25
100	7,2	0,95	3200	5	600	25
110	7,8	0,95	3590	5	660	25
120	7,9	0,9	3880	5	720	25
125	8,3	0,9	4075	5	750	25
150	9,8	0,9	6110	4	900	25
200	12,0	0,9	8730	3	1200	25

STC - Hose clamps with screw
BANDI BLOCK - tightening
torque

-5°C / +60°C
+23°F / +140°F

NORM.: ISO 1307