


The pilot operated pressure relief valves from the Parker Manapak series RM are in sandwich design for easy configuration of stack systems. Depending on type, pressure limiting can be achieved in ports P, A or B with unloading to port T.

RM valves may only be mounted in the defined mounting position.


Features

- The valve bodies of the Parker Manapak valve series RM are made of steel.
- The pressure can be set by hexagon socket screw (RM4), hexagon socket screw or knob with cylinder lock (RM6). Piloting results in a flat p/Q performance curve.
- Piloting results in a flat p/Q performance curve.
- The orifices located in the main spool limit the pilot oil flow.

Schematics RM4-NG16, RM6-NG25 (only PT)

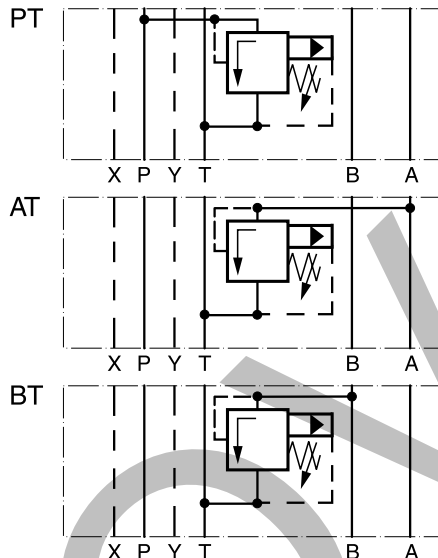


RM6

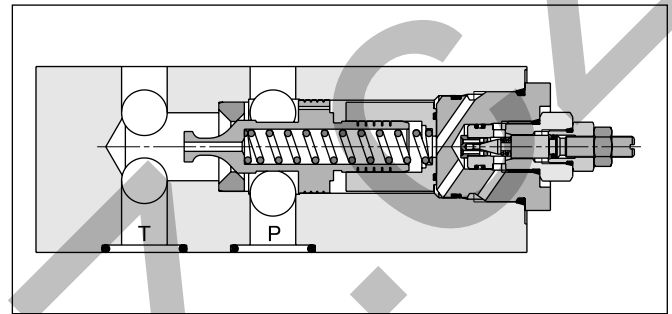


RM6

Technical data

General			
Design		Pilot operated pressure relief valve	
Actuation		hydraulic	
Size		NG16	NG25
Mounting interface		ISO 4401	
Mounting position		unrestricted	
Ambient temperature		[°C]	-20...+60
MTTF _D value		[years]	150
Weight		[kg]	4.95.9
Hydraulic			
Max. operating pressure		[bar]	350
Fluid		Hydraulic oil according to DIN 51524	
Fluid temperature		[°C]	-20...+70
Viscosity, permitted		[cSt] / [mm²/s]	20 ... 400
Viscosity, recommended		[cSt] / [mm²/s]	30 ... 80
Filtration		ISO 4406 (1999); 18/16/13	


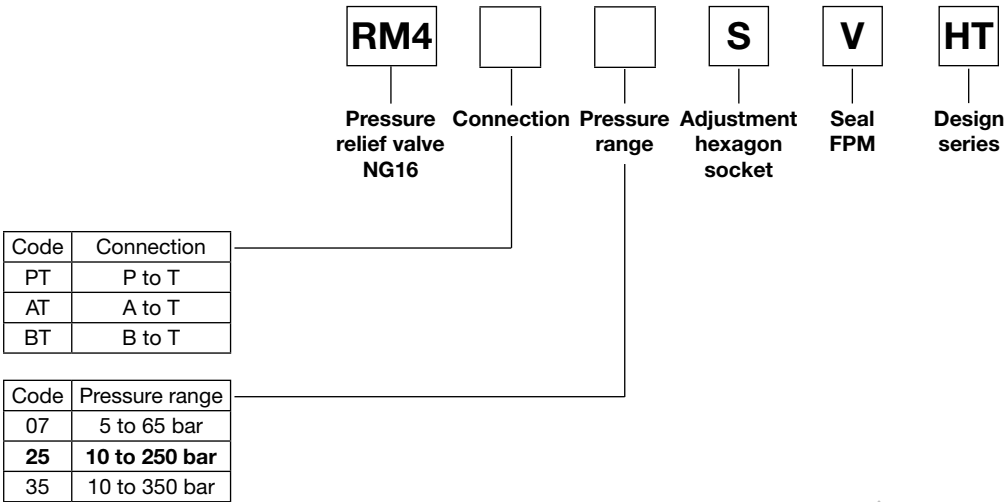


7


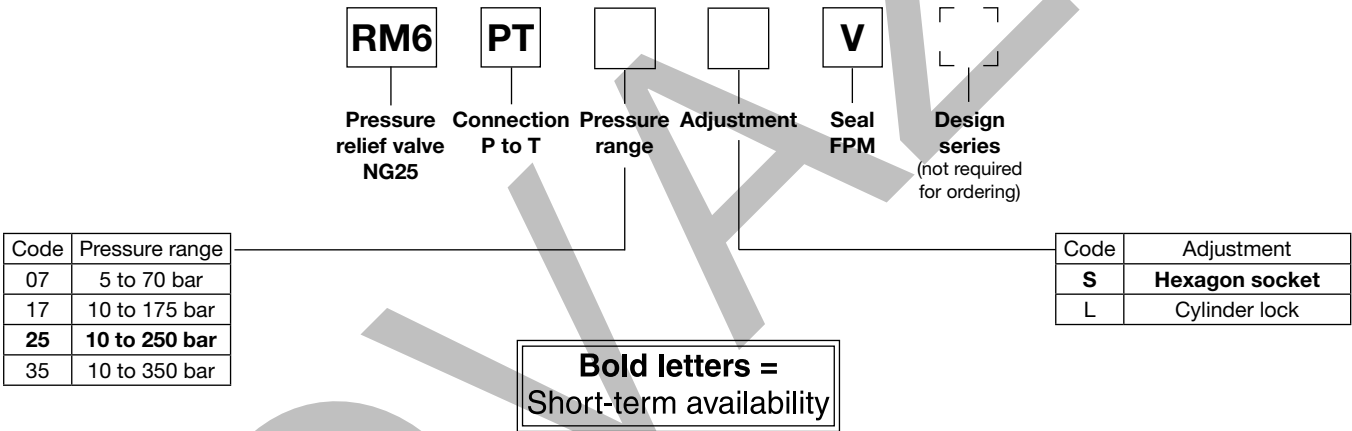


p/Q performance curves


RM4

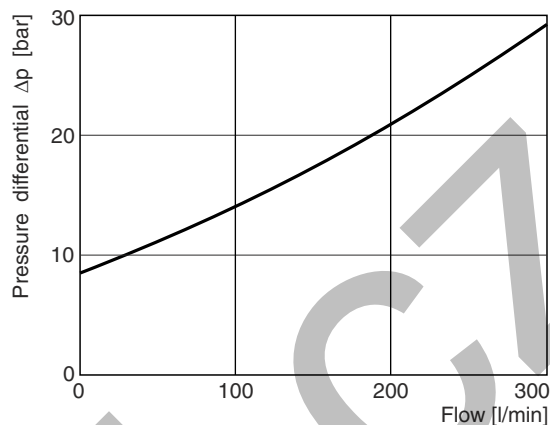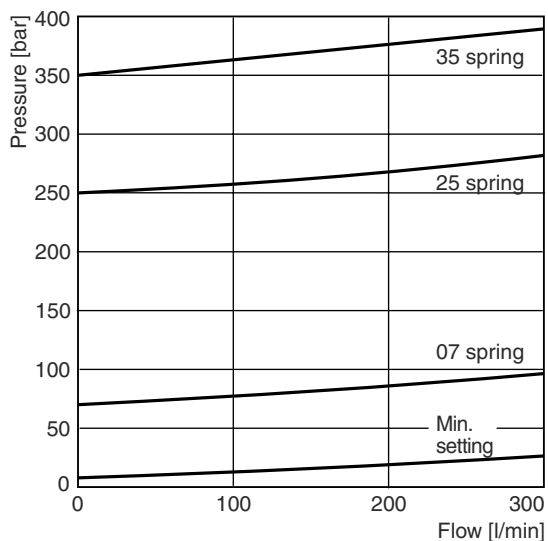



RM6

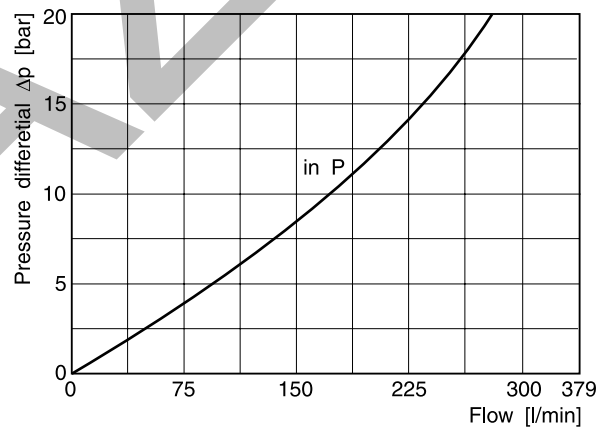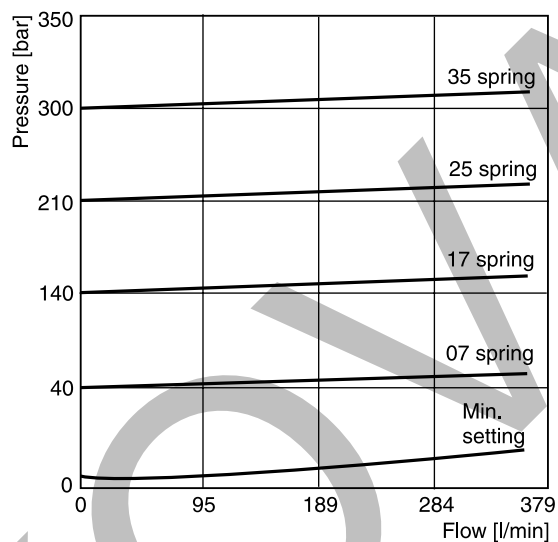

All characteristic curves measured with HLP46 at 50 °C.

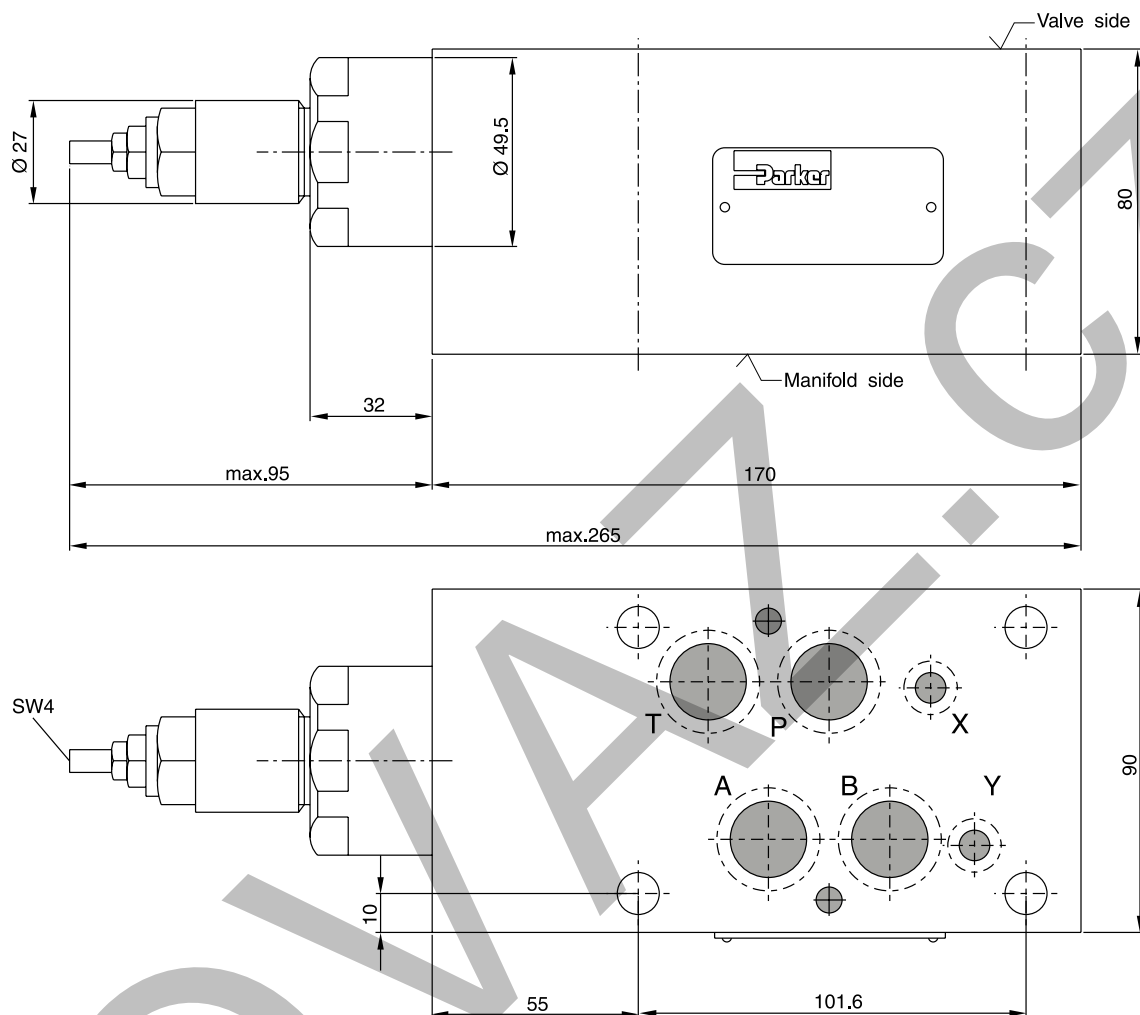RM4**Adjustment code S**

Seal kit RM4	
Seal	Order code
V	SK-RM4-V-HT

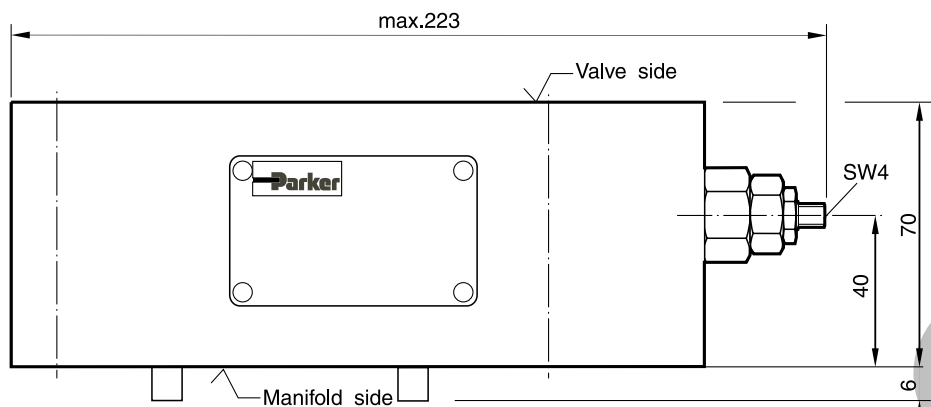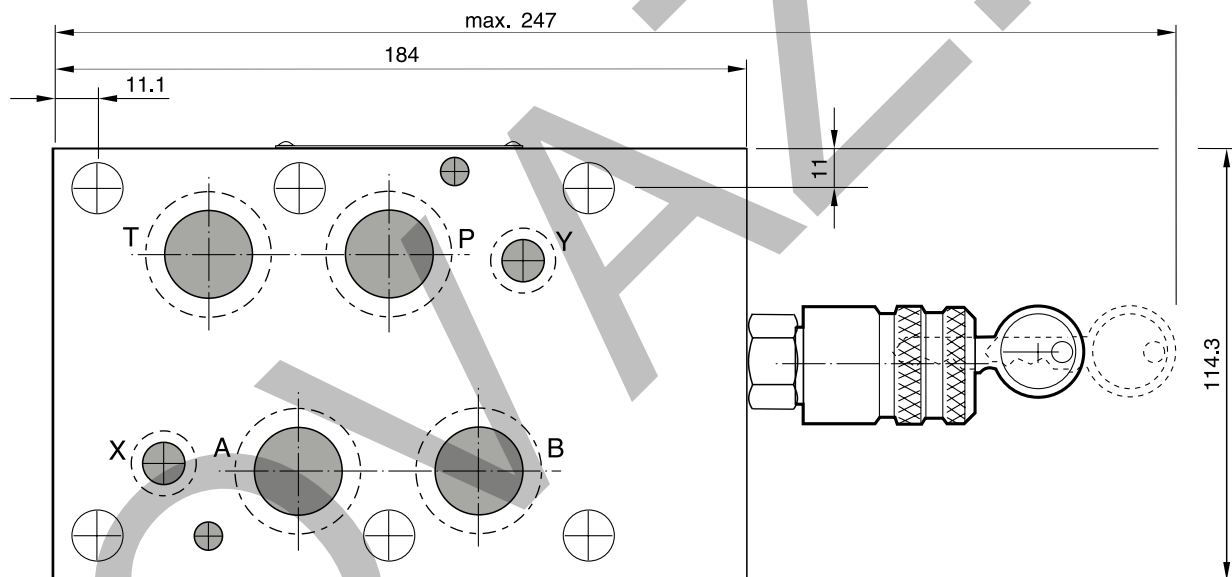RM6**Adjustment Code S****Adjustment Code L**

Seal kit RM6	
Seal	Order code
V	SK-RM6-V-11