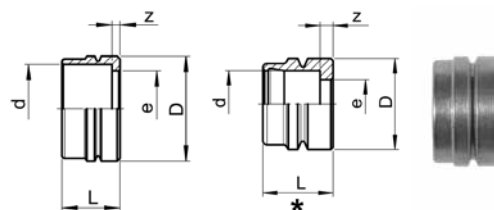


Klemmring
Bague de serrage
Compression ferrule

SO 40001

Type-d	Mat.-Nr.	bar	L	D	z	e	kg/100
Für metrische Rohre	Pour tubes métriques	For metric tubes					
SO 40001-2	016.0010.020	125	3.5	5.0	0.6	1.5	0.015
SO 40001-3	016.0010.030	125	4.5	5.0	0.8	2.5	0.030
SO 40001-4	016.0010.040	125	5.0	6.0	1.0	3.4	0.050
SO 40001-5	016.0010.050	125	5.5	6.8	1.0	4.0	0.060
SO 40001-6 *	016.0010.060	250	6.5	8.4	1.2	4.5	0.120
SO 40001-8 *	016.0010.080	150	7.0	10.4	1.2	6.5	0.170
SO 40001-10 *	016.0010.100	125	7.8	12.7	1.2	8.5	0.250
SO 40001-12 *	016.0010.120	100	8.8	14.7	1.2	10.0	0.330
SO 40001-14 *	016.0010.140	40	10.0	17.5	1.4	12.0	0.550
SO 40001-15 *	016.0010.150	40	10.0	18.0	1.4	13.0	0.530
SO 40001-16 *	016.0010.160	40	11.7	21.0	1.4	14.0	0.980
SO 40001-17 *	016.0010.170	40	11.7	21.0	1.4	15.0	0.900
SO 40001-18 *	016.0010.180	40	11.7	22.0	1.4	16.0	0.910
SO 40001-22 *	016.0010.220	25	13.5	26.0	1.4	20.0	1.270
SO 40001-28 *	016.0010.280	16	15.4	32.5	2.0	24.0	2.140
SO 40001-35 *	016.0010.350	16	17.0	39.5	2.0	32.5	3.000

Für Zollrohre	Pour tubes pouces	For inch tubes					
SO 40001-3,2	016.0010.032	125	4.5	5.0	0.8	2.5	0.030
SO 40001-6,35 *	016.0010.063	250	6.5	8.4	1.2	4.5	0.110
SO 40001-7,94 *	016.0010.079	150	7.0	10.4	1.2	6.5	0.170
SO 40001-9,52 *	016.0010.095	125	7.8	12.7	1.2	8.0	0.280
SO 40001-15,88	016.0010.158	40	11.7	21.0	1.4	14.0	0.510
SO 40001-22,22	016.0010.222	25	13.5	26.0	1.4	20.0	1.280

Umrechnung für "d" bei Zollrohren:

3,2 = 1/8
 6,35 = 1/4
 7,94 = 5/16
 9,52 = 3/8
 15,88 = 5/8
 22,22 = 7/8

Conversion de "d" pour tubes en pouces:

3,2 = 1/8
 6,35 = 1/4
 7,94 = 5/16
 9,52 = 3/8
 15,88 = 5/8
 22,22 = 7/8

Conversion for "d" for inch tubes:

3,2 = 1/8
 6,35 = 1/4
 7,94 = 5/16
 9,52 = 3/8
 15,88 = 5/8
 22,22 = 7/8