


Schwenkverschraubung

Coude banjo

Single banjo

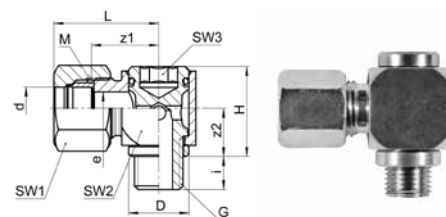


SO 6096

Type -d -G	Mat.-Nr.	bar	M	SW1	SW2	SW3	L	D	H	i	z1	z2	e	kg/100
G=Rohrgewinde (zylindrisch)			G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)								
SO 6096-6-1/8	218.2841.100	400	12x1.5	14	18	6	28.0	14.0	22.0	8.0	20.0	12.0	4.0	6.100
SO 6096-8-1/4	218.2841.170	300	14x1.5	17	22	8	30.0	18.0	28.0	12.0	22.0	16.0	6.0	10.200
SO 6096-10-1/4	218.2841.270	250	16x1.5	19	22	8	33.0	18.0	28.0	12.0	23.0	16.0	7.0	11.600
SO 6096-12-3/8	218.2841.390	250	18x1.5	22	28	10	38.0	22.0	33.0	12.0	26.0	18.0	9.0	19.300
SO 6096-14-1/2	218.2841.504	250	22x1.5	27	30	12	41.0	26.0	37.0	14.0	28.0	20.0	11.0	27.800
SO 6096-15-1/2	218.2841.534	200	22x1.5	27	30	12	41.0	26.0	37.0	14.0	28.0	20.0	11.0	27.800
SO 6096-16-1/2	218.2841.566	200	24x1.5	30	32	14	44.0	26.0	39.0	14.0	29.0	21.0	12.0	32.000
SO 6096-18-1/2	218.2841.646	200	26x1.5	32	32	14	45.0	26.0	39.0	14.0	29.0	21.0	14.0	33.300
SO 6096-18-3/4	218.2841.648	200	26x1.5	32	40	17	51.0	32.0	47.0	17.0	35.0	25.0	16.0	56.300
SO 6096-20-1/2	218.2841.706	200	26x1.5	32	32	14	47.0	26.0	39.0	14.0	30.0	21.0	14.0	33.300
SO 6096-20-3/4	218.2841.708	200	26x1.5	32	40	17	53.0	32.0	47.0	17.0	36.0	25.0	16.0	56.300
SO 6096-22-3/4	218.2841.768	160	30x2.0	36	40	17	50.0	32.0	47.0	17.0	36.0	25.0	18.0	60.200
SO 6096-25-1	218.2841.810	160	33x2.0	41	46	22	58.0	39.0	54.0	19.0	41.0	29.0	20.0	88.100
SO 6096-28-1	218.2841.850	160	36x2.0	41	46	22	57.0	39.0	54.0	19.0	41.0	29.0	24.0	79.400

Schwenkverschraubung METR

Coude banjo METR

Single banjo METR

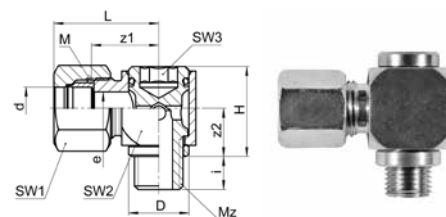

SO 6096 METR

Type -d -Mz	Mat.-Nr.	bar	M	SW1	SW2	SW3	L	D	H	i	z1	z2	e	kg/100
Mz=metrisches Gewinde (zylindrisch)			Mz=Filetage métrique (cylindrique)			Mz=Metric thread (parallel)								
SO 6096-6-M10x1	218.2843.180	400	12x1.5	14	18	6	28.0	14.0	22.0	8.0	20.0	12.0	4.0	6.100
SO 6096-8-M12x1,5	218.2843.240	300	14x1.5	17	20	6	30.0	17.0	25.0	12.0	21.0	15.0	6.0	9.500
SO 6096-10-M14x1,5	218.2843.280	250	16x1.5	19	22	8	33.0	19.0	28.0	12.0	23.0	16.0	7.0	12.000
SO 6096-12-M16x1,5	218.2843.330	250	18x1.5	22	28	10	38.0	21.0	33.0	12.0	26.0	18.0	9.0	19.300
SO 6096-14-M18x1,5	218.2843.380	250	22x1.5	27	30	12	41.0	23.0	37.0	12.0	28.0	20.0	11.0	26.400
SO 6096-15-M18x1,5	218.2843.390	200	22x1.5	27	30	12	41.0	23.0	37.0	12.0	28.0	20.0	11.0	26.400
SO 6096-18-M22x1,5	218.2843.460	200	26x1.5	32	32	14	45.0	27.0	39.0	14.0	29.0	21.0	14.0	33.700
SO 6096-20-M22x1,5	218.2843.500	200	26x1.5	32	32	14	47.0	27.0	39.0	14.0	30.0	21.0	14.0	33.700
SO 6096-22-M26x1,5	218.2843.535	160	30x2.0	36	40	17	50.0	31.0	47.0	17.0	36.0	25.0	18.0	59.700
SO 6096-25-M33x2	218.2843.550	160	33x2.0	41	46	22	58.0	39.0	54.0	19.0	41.0	29.0	20.0	88.100
SO 6096-28-M33x2	218.2843.570	160	36x2.0	41	46	22	57.0	39.0	54.0	19.0	41.0	29.0	24.0	79.000